



Sealant and adhesive supply system 專業高黏度供膠-注膠設備

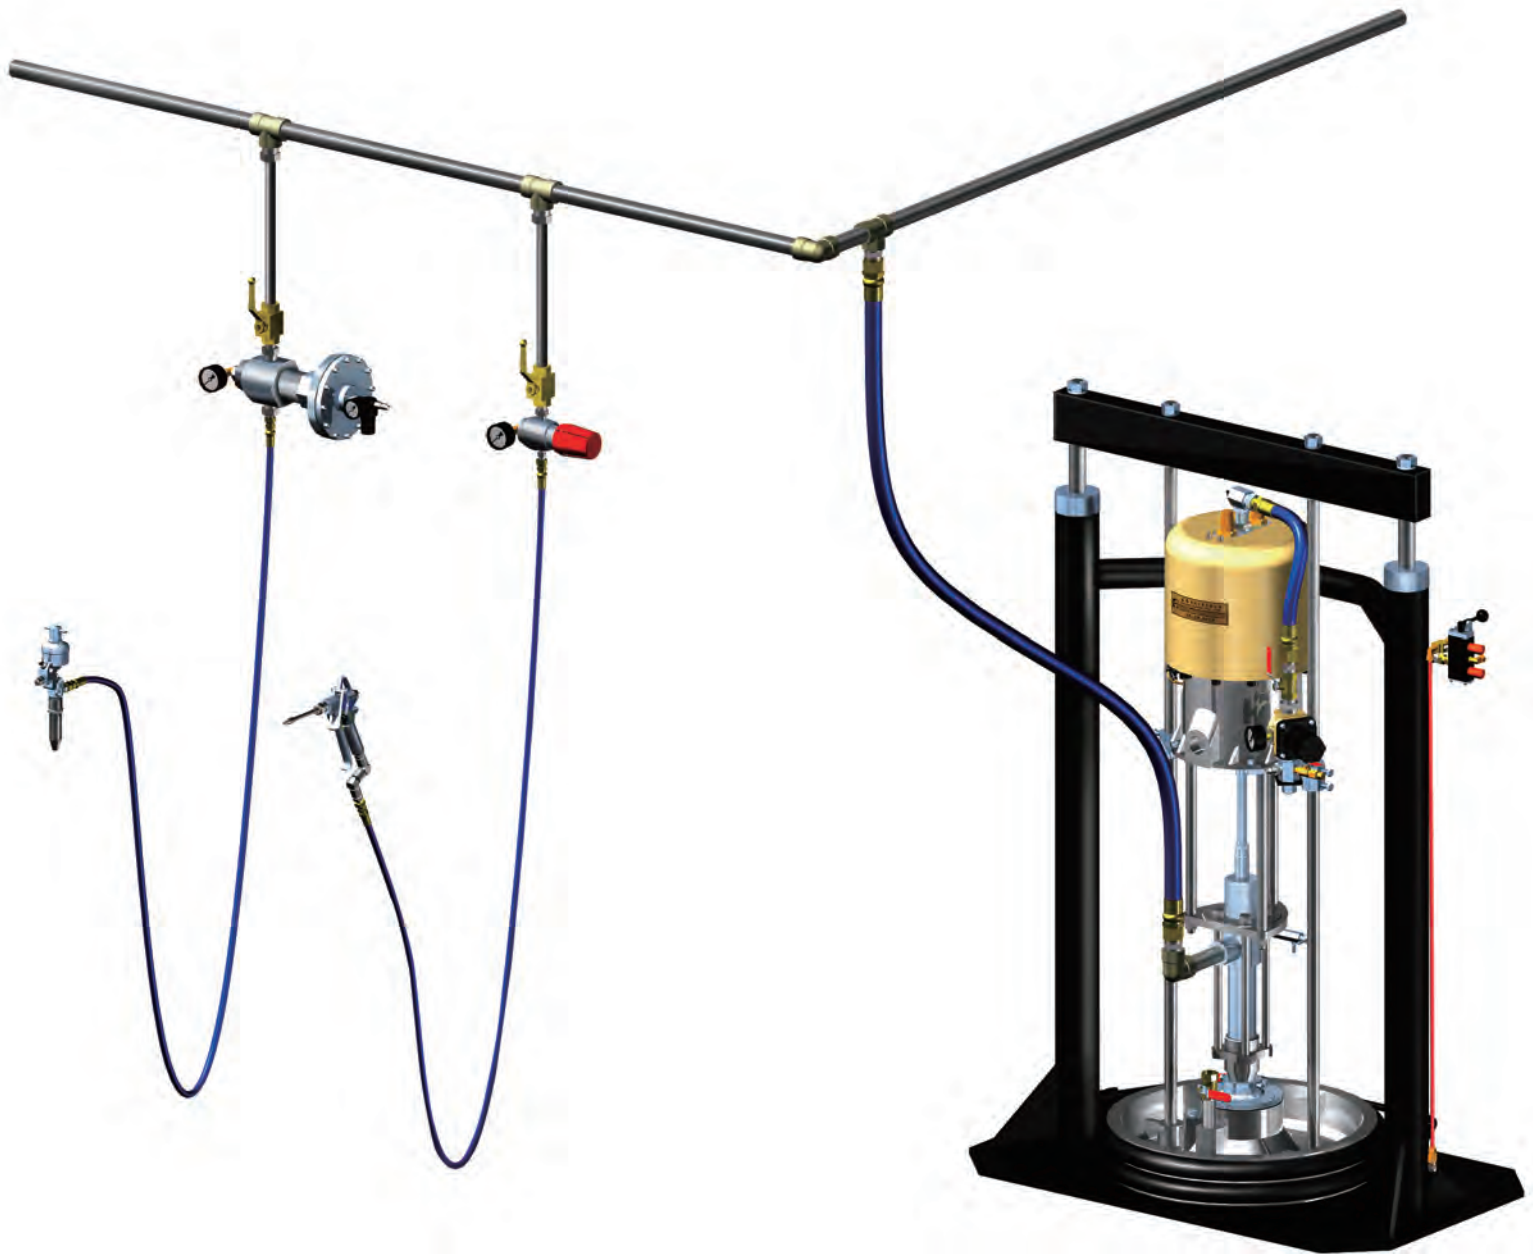

Precise 精確的 Robust 堅固耐用的 Reliable 可信賴的


春泰機械工程有限公司 Fuspect Taiwan Pty., Ltd

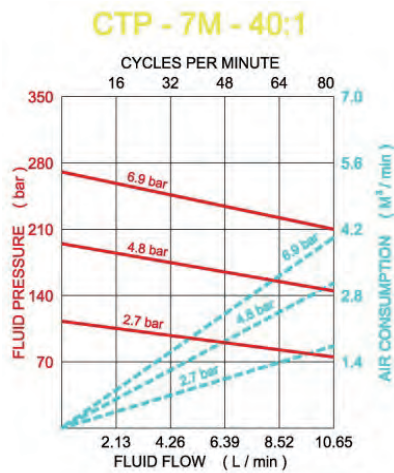

Quiet 靜音型

Model 型號: CTP-7M-40:1 (107-040)


Ratio 壓力比 ----- 40:1
Flow rate 吐出量 ----- 8 l/min
Fluid pressure 最大輸出壓力 ----- 275 bar
Air inlet pressure 最大空氣壓力 ----- 7 bar
Air motor diameter 汽缸直徑 ----- Φ 178mm
Air Consumption 空氣消耗 ----- 1100 l/min
Air inlet size 空氣入口 ----- 1/2" PT
Fluid outlet size 泵浦出口 ----- 1" PT
Container size 原料容器 ----- pail 5 gal.
Air powdered lift 升降汽缸 ----- single post

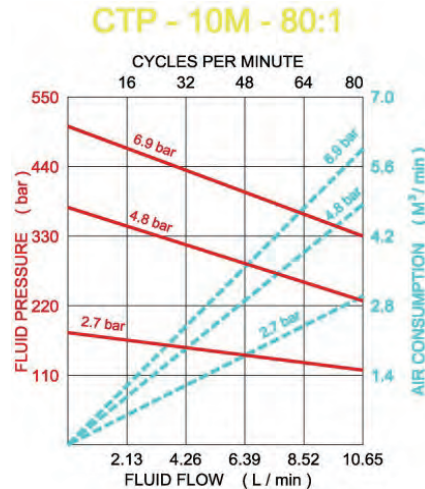

Quiet 靜音型

Model 型號: CTP-10MQ-80:1 (Q08-160)


Ratio 壓力比 ----- 80:1
Flow rate 吐出量 ----- 8 l/min
Fluid pressure 最大輸出壓力 ----- 420 bar
Air inlet pressure 最大空氣壓力 ----- 7 bar
Air motor diameter 汽缸直徑 ----- Φ 254mm
Air Consumption 空氣消耗 ----- 2800 l/min
Air inlet size 空氣入口 ----- 3/4" PT
Fluid outlet size 泵浦出口 ----- 1" PT
Container size 原料容器 ----- pail 5 gal.
Air powdered lift 升降汽缸 ----- single post
Noise level 運轉噪音 ----- 84db

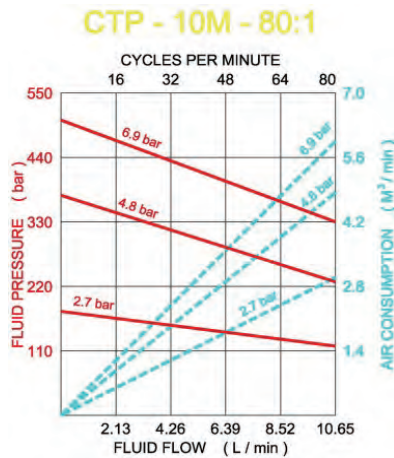

Quiet 靜音型

Model 型號: CTP-10MQ-80:1 (Q08-260S)

Ratio 壓力比 ----- 80:1
Flow rate 吐出量 ----- 8 l/min
Fluid pressure 最大輸出壓力 ----- 420 bar
Air inlet pressure 最大空氣壓力 ----- 7 bar
Air motor diameter 汽缸直徑 ----- Φ 254mm
Air Consumption 空氣消耗 ----- 2800 l/min
Air inlet size 空氣入口 ----- 3/4" PT
Fluid outlet size 泵浦出口 ----- 1" PT
Container size 原料容器 ----- pail 5 gal.
Air powdered lift 升降汽缸 ----- two posts
noise level 運轉噪音 ----- 84db

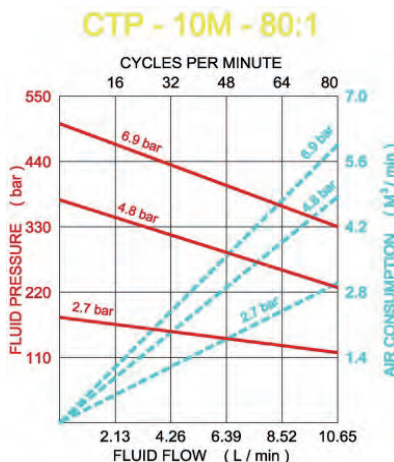


Quiet 靜音型

Model 型號: CTP-10MQ-80:1 (Q08-260)

Ratio 壓力比 ----- 80:1
Flow rate 吐出量 ----- 8 l/min
Fluid pressure 最大輸出壓力 ----- 420 bar
Air inlet pressure 最大空氣壓力 ----- 7 bar
Air motor diameter 汽缸直徑 ----- Φ 254mm
Air Consumption 空氣消耗 ----- 2800 l/min
Air inlet size 空氣入口 ----- 3/4" PT
Fluid outlet size 泵浦出口 ----- 1" PT
Container size 原料容器 ----- drum 50 gal.
Air powdered lift 升降汽缸 ----- two posts
noise level 運轉噪音 ----- 84db



CTP - 10M - 55:1

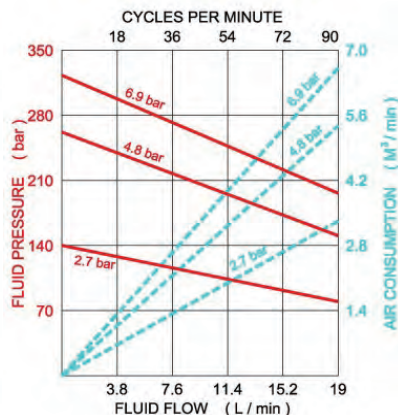

Quiet 靜音型

Model 型號: CTP-10MQ-55:1 (Q08-055)

Ratio 壓力比 ----- 55:1
 Flow rate 吐出量 ----- 12 l/min
 Fluid pressure 最大輸出壓力 ----- 341 bar
 Air inlet pressure 最大空氣壓力 ----- 7 bar
 Air motor diameter 汽缸直徑 ----- Φ 254mm
 Air Consumption 空氣消耗 ----- 2800 l/min
 Air inlet size 空氣入口 ----- 3/4" PT
 Fluid outlet size 泵浦出口 ----- 1" PT
 Container size 原料容器 ----- drum 50 gal.
 Air powdered lift 升降汽缸 ----- two posts
 Noise level 運轉噪音 ----- 84db

A500B 手動塗膠槍 Dispense Gun



Part No. ----- 350-002
 Max. working pressure --- 450 bar
 Outlet port size ----- 1/4" npt
 Inlet port size ----- 1/4" npt
 Dry weight ----- 600g

日本 Pyles 手動塗膠槍 Dispense Gun



Part No. ----- 12004 (Pyles Japan)
 Max. working pressure --- 450 bar
 Outlet port size ----- 3/8" npt
 Inlet port size ----- 1/2" npt
 Dry weight ----- 650g

3/4" 高壓塗料調壓器-氣控 Mastic Fluid Regulator Air Operated



Part No. ----- MFRAY11
 Sealant inlet --- 3/4" npt (F)
 Sealant outlet --- 3/4" npt (F)
 Max. Inbound -- 17 - 310 bar
 Regulated P --- 7 bar
 Max. Delivery --- 80,000 CPS, 1.5gpm
 Weight ----- 7.9kg

3/8" 高壓塗料調壓器 High Pressure Fluid Regulator



Part No. ----- 274-020
 Paint inlet ----- 3/8" npt (F)
 Paint outlet ----- 1/2" npt (F)
 Max. Inbound -- 207 bar
 Regulated P --- 70 - 207bar
 Max. Delivery --- 70 CPS, 13.3L/min
 Weight ----- 3kg

高壓 3向旋轉接頭 High Pressure Z Type 3 Ways Swivel



Part No. ----- HPZS01
 Inlet ----- 1/4" (M)
 Outlet ----- 1/4" (M)
 Max. Pressure --- 450 bar
 Material ----- Steel plated
 Packing ----- PTFE

高壓旋轉接頭 High Pressure Swivel



Part No. ----- G50-023
 Inlet / Outlet ----- 1/4" (F)
 Max. Pressure --- 450 bar
 Material ----- Steel plated
 Packing ----- PTFE

選項品-壓盤與膠圈迫緊

Platen and wiper options




加熱型泵浦系統

Thermo pumping system



自動化應用 Robotic application

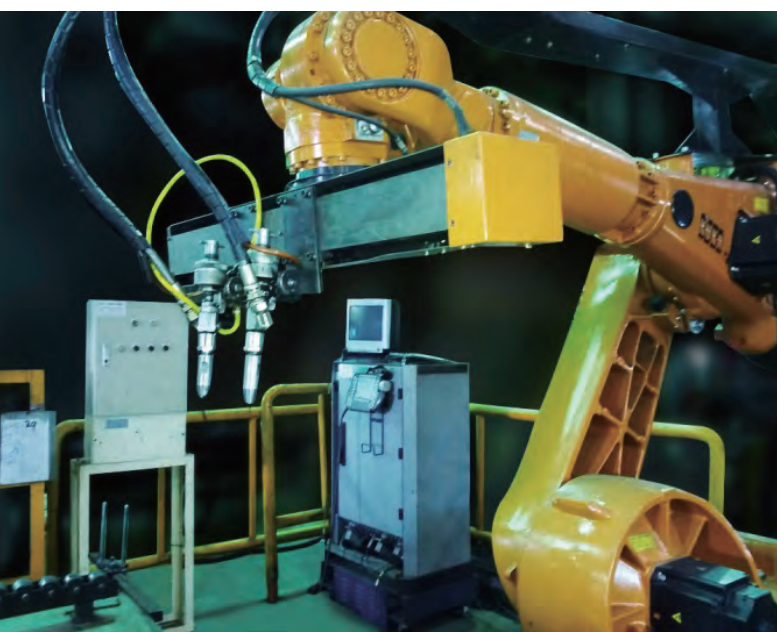

Approximate Viscosities of Common Materials (At Room Temperature-21°C) 常見原料粘度

Material 原料	Viscosity In Centipoise 粘度	power factor needed 壓力比參考
Water /水	1 cps	1:1
Milk /牛奶	3 cps	1:1
SAE 10 Motor Oil /潤滑油	85-140 cps	1:1
SAE 20 Motor Oil /潤滑油	140-420 cps	1:1
SAE 30 Motor Oil /潤滑油	420-650 cps	1:1
SAE 40 Motor Oil /潤滑油	650-900 cps	2:1
Castor Oil /食用油	1000 cps	3:1
Syrup /糖漿	5000 cps	5:1
Honey /蜂蜜	10000 cps	10:1
Chocolate Syrup /巧克力醬	25000 cps	15:1
Ketchup /蕃茄醬	50000 cps	25:1
Mustard /芥末	70000 cps	30:1
Sour Cream /酸奶	100000 cps	35:1
Peanut Butter /花生醬	250000 cps	40:1
Shortening /起酥油	1200000 cps	consult factory



春泰機械工程有限公司

桃園縣龜山鄉 干333 忠義路 2段 260巷 65號

TEL: (03) 3185977 FAX: (03) 3185978

Fuspec Taiwan Pty, Ltd.

No. 65, Lane 260, Sec. 2, Zhong Yi Rd., Guei Shan Town, Taoyuan 333, Taiwan

E-mail: fpec@ms22.hinet.net

website: www.chuntai-coating.com.tw